Nortec-Pro EVO DUAL

NEW

TECHNICAL DATA

Vacuum pump	**100 l/min 2x 300**
Compressor capacity	**gr/min R134a and**
Factor handling (type)	**HFO1234yf 2x 10,5**
Tank capacity	**kg**
Oil/additive standard injection	**scaled (dosing by**
Oil tanks	**oil scales)** **g (new oil, used, contrast)**
Automatic valves	**No**
Graphic display with icons	**4,7" Monochrome**
Multilingual software	Yes
Hoses	3m (optional max. 9m)
Database and graphics upgrade of via USB	**Yes (Free)**
Printer	**in standard**
HP/LP gauges class 1,	Class 1 with working pressu
Tank's pressure gauge	**2 included**
Moisture filter	Yes
Facilitated charge in each temperature condition with BST system	**BST System**
Built-in database (cars, industrial vehicles, agricultural machines)	**Yes**
Leakage test with nitrogen (with kit 01.000.218 on request)	Yes (optional)
Gas analyzer HFO1234YF set up (with kit on request)	Yes (optional)
Dimensions, cm	50x58,5x113 cm
Weight, kg	100 kg

HIGH CLASS CONNECTORS

OIL TANKS AS STANDARD

CLEAR CONTROL PANEL

EDmeccanica www.emgs.it, info@emgs.it, 0221117094

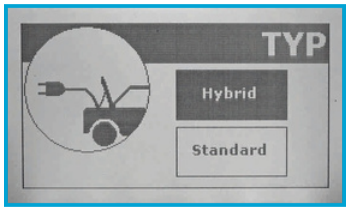



Multi-language menu! Simple and intuitive operation

Possibility to create customer databases, detailed printout after the end of the vehicle service process.

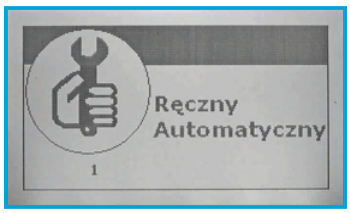

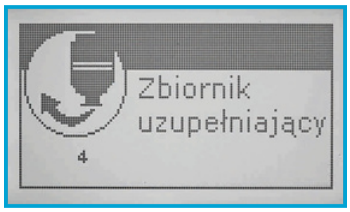

Internal rinsing of the device! (option for hybrids)

The BST system allows you to recharge the refrigerant in vehicle air-conditioning systems with the compressor located in the air conditioning station. **It replaces the heating belt** and increases the accuracy recovering gas from the vehicle system by sucking above the minimum pressure.

Extensive vehicle database (passenger, truck and agricultural) with **FREE UPDATE!** You ca

custom vehicles into the database. Service of **HYBRID** vehicles.

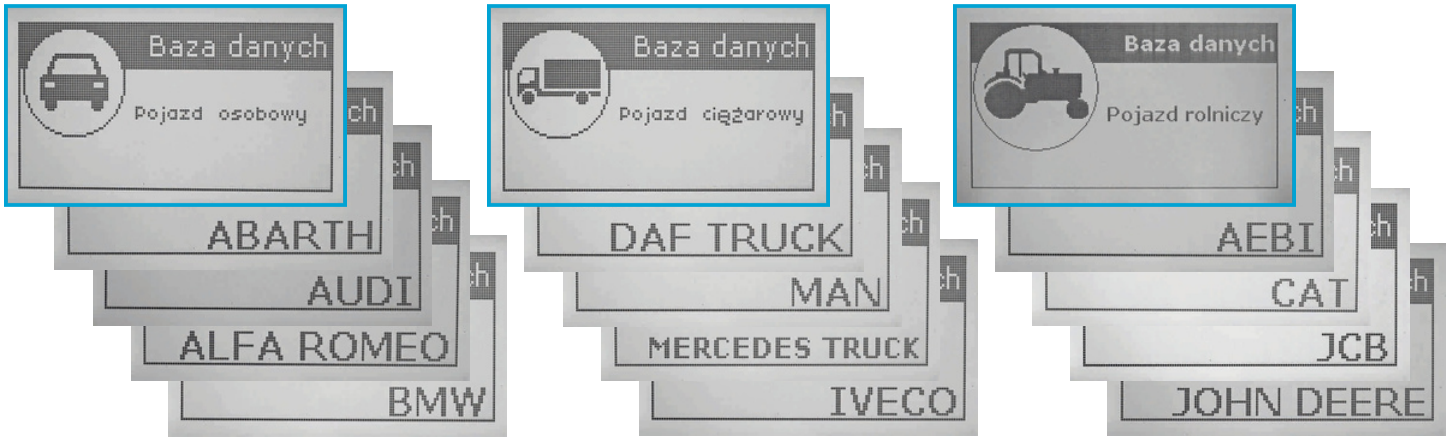



HANDLE
HOSE FIXING

DOUBLE CONNECTOR SYSTEM
R134a AND HFO1234yf
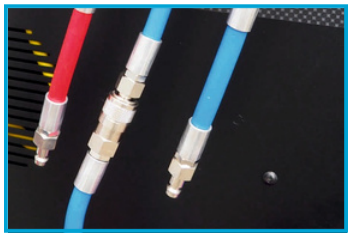
STANDARD HOSES WITH A LENGTH OF 3 METERS **(OPTIONAL EXTENSION POSSIBILITY UP TO 9 METERS)**