MO320 PREMIUM

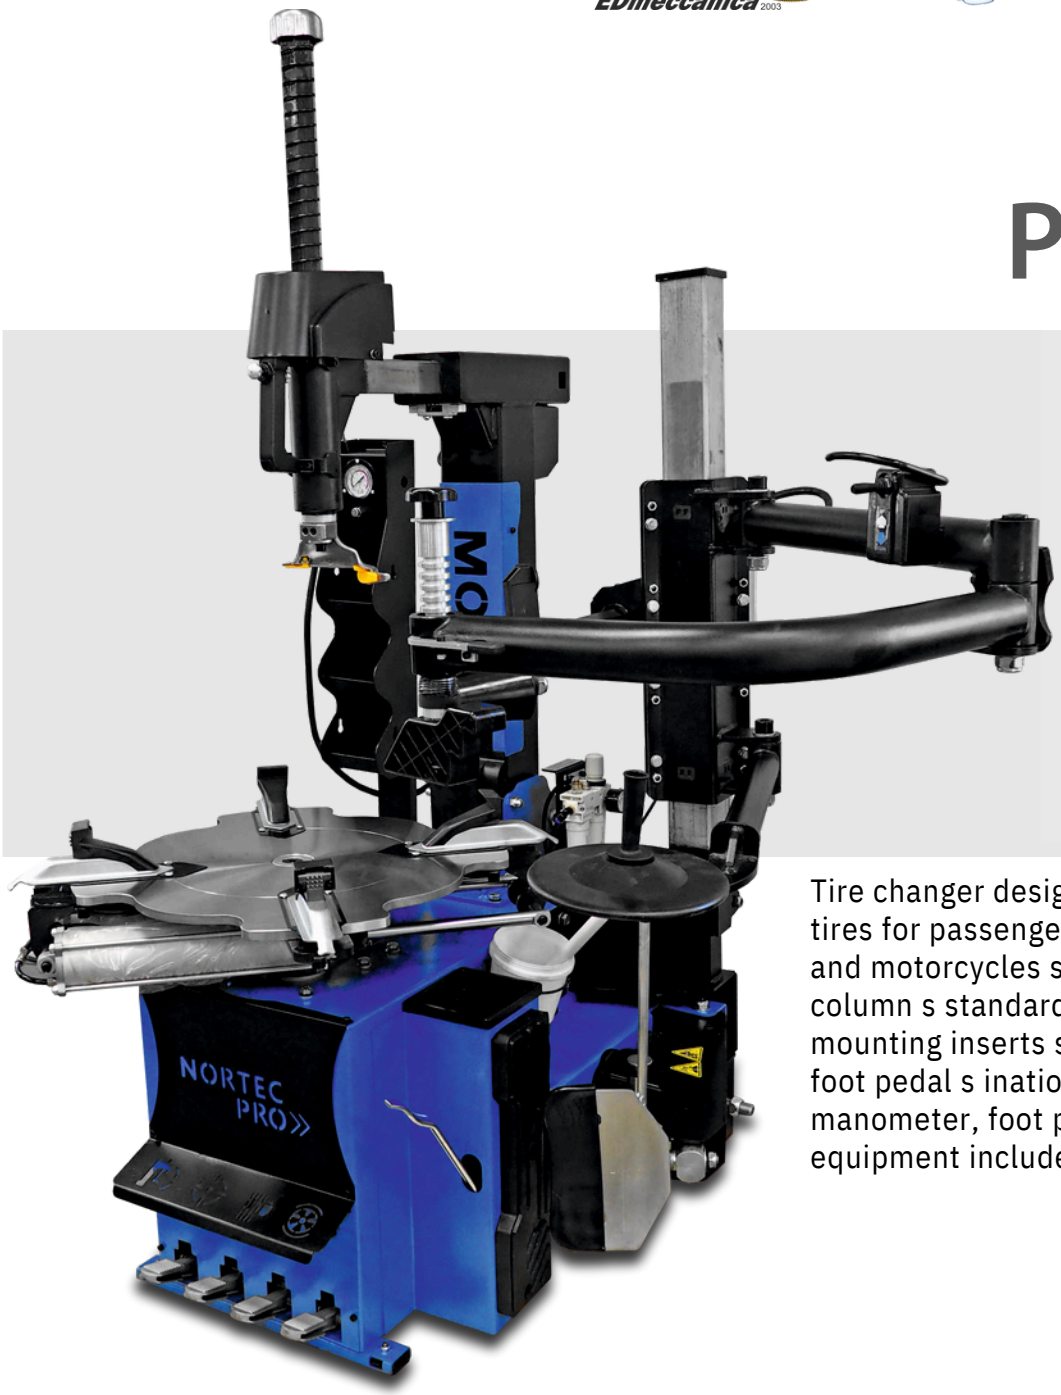

SUPPLY:	400V/50Hz
MOTOR POWER:	0,75 kW
PNEUMATIC SUPPLY:	8-12 bar
EXTERNAL RIM RANGE:	11" - 21"
INTERNAL RIM RANGE:	13" - 24"
BEAD BREAKER FORCE:	2500 kg
MAX. WHEEL DIAMETER:	1150 mm
MAX.WHEEL WIDTH:	13"
NOISE LEVEL:	<70 dB
WEIGHT:	300 kg

Tire changer designed for mounting and dismounting tires for passenger cars, light commercial vehicles, and motorcycles s pneumatically tilting and locking column s standard equipment includes protective mounting inserts s two-speed turntable controlled by foot pedal s ination gauge with integrated manometer, foot pedal operated s standard equipment includes an helping arm

PNEUMATICALLY TILTING COLUMN AND LOCKABLE HEAD

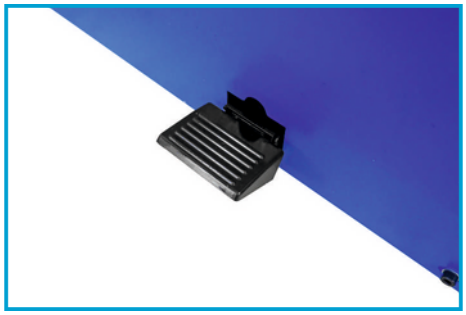

FOOT PEDAL-CONTROLLED WHEEL INFLATION SYSTEM

PRESSURE GAUGE WITH MANOMETE FOR INFLATION

TWO TURNTABLE ROTATION SPEEDS
CONTROLLED BY FOOT PEDAL

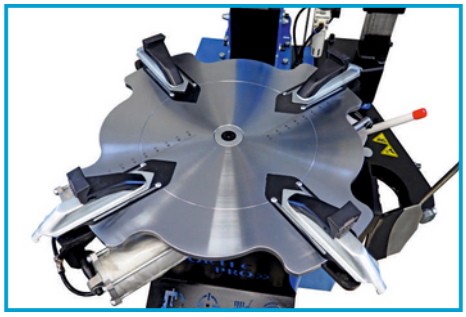

PROFILED TABLE MADE
OF HIGH-STRENGTH STEEL

AIR PREPARATION UNIT INCLUDED
AS STANDARD EQUIPMENT

PRESSING ROLLER OF THE HELPING AR

PNEUMATICALLY CONTROLLED
HELPING ARM

HELPING ARM PRESSURE
WITH HEIGHT ADJUSTMENT

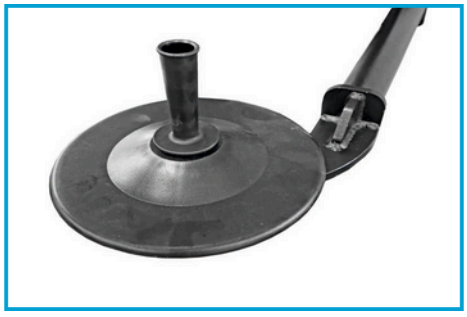

HELING ARM PLATE ASSISTING
IN TIRE MOUNTING/DISMOUNTING